

IS-600 III

Ophthalmic unit



PERFORMANCE
YOU CAN COUNT ON



High quality & ergonomic design

Refraction unit without compromise



IS-600III

The Topcon IS-600 III has been developed as a refraction unit without compromise. The unit is a comfortable and stable workstation to accommodate two instruments which can be adapted to various kinds of examination rooms. The IS-600 III can be fitted with several optional accessories such as; four different types of phoropter arms, chair footrest, extra drawers, tabletop electro brake and a LED reading light. The integrated control panel allows the user to control the elevation of the chair, the room illumination light and installed instruments.

- » Small footprint
- » Powered elevation of tabletop
- » Adjustable positioning of tabletop with electro-brake (optional)
- » Various options such as LED reading light
- » Dimming of room light feature
- » Integrated cable management system
- » Wheelchair accessibility

IS-600 III configurations

The IS-600 III comes in a wide variety of configurations. For both IS-600 III basic and IS-600 III wheelchair version there is a right and left option available. In all these configurations the IS-600 III can be equipped with a fixed table height or a powered elevating table top

for easy adjustments of the instrument heights for both patient and practitioner. Another option is a set of two drawers which can incorporate a power supply for the Topcon CV-5000 phoropter.



IS-600 III right version with power supply drawer



IS-600 III right wheelchair version

Elevated column configuration

The IS-600 III is also available with the column fixed to the instrument tabletop. When moving the tabletop up or down, the column with the phoropter will move accordingly keeping the phoropter in the same eye-level as the tabletop instruments. Having all instruments in the same “plane” reduces adjustment time of the phoropter and/or instruments and assures a quick workflow. The simultaneous rotation of the column with the tabletop in combination with the linear phoropter arm prevents the phoropter of colliding with the tabletop instruments.



IS-600 III right version with elevated column

IS-600 III configurations

IS-600 III elevated column



- » All instruments same eye-level
- » No phoropter adjustment time
- » No phoropter interference with other instruments



IS-600 III standard accessories



Trial lens drawer & control panel

The IS-600 III trial lens drawer accommodates the units control panel which has various functions.

- » Chair elevation & descend, as well as automatic descend to its lowest position.
- » Tabletop elevation and descend (only IS-600III with elevated tabletop)
- » Reading light
- » Dimming of room illumination
- » Chart projector
- » Two Auxiliary instruments
- » Dimming of slit lamp / ophthalmometer



Room illumination

The dimmable up-lighter illuminates the room indirectly and can be dimmed.

Projector support

The dedicated IS-600 III projector support allows mounting of Topcon chart projectors.



Safety-stop

The safety-stop guarantees patients safety when operating the elevation of tabletop or chair.

Chinrest support

The IS-600 III tabletop is equipped with a tabletop fixed chinrest support, but can be changed with an optional sliding chinrest support, in case you want to operate two instruments with the same chinrest.

Cable management

The cable management system keeps the IS-600 III design smooth and contemporary. All cables of instruments installed on the tabletop can invisibly be guided through the tabletop cable management system.

Electronic brake for tabletop

The IS-600 III can be equipped with the optional electro-brake. This electro-brake will see to it that with the use of a foot switch the tabletop rotation can be locked in any position of your choice.

IS-600 III optional accessories



Power supply drawer

The optional drawer unit fits seamlessly to the basic unit and provides two drawers with storage space for hand held equipment and documents. The top drawer panel can be exchanged to allow installation of the Topcon CV-5000 power supply.



LED near vision lamp

The adjustable LED reading lamp provides crisp white illumination which supports reading examinations.



Potentio meter

The optional potentiometer situated on the tabletop can be used for regulating illumination of any instrument which does not have illumination dimming on board.



Controller satellite support

The basic satellite support can accommodate the control unit of the CV-5000 refraction system such as the KB-50S. The rotatable tabletop allows the user to have the greatest flexibility. The advanced satellite support accommodates the KB-50S as well as the CV-5000 power supply to ensure easy access of the print-out. This advanced satellite support is available in the IS-600 III color white.

IS-600 III optional phoropter arm

VT-670 phoropter arm

The VT-670 phoropter arm enables mounting of most available phoropter heads. The mechanical lock ensures fixed positioning of the phoropter in front of the patient.



VT-671 phoropter arm

The VT-671 phoropter arm is provided with a handle for easy manoeuvring of the phoropter. A spring loaded counter balance ensures stable positioning of the phoropter.



Optional accessory VT-670/671

For VT-670/671 a dedicated wall mount in respective VT colour is available.



VT-72 manual linear phoropter arm

The VT-72 is a linear phoropter arm which is specially designed to accommodate the CV-5000 computerized phoropter. The handle ensures a firm grip to control the movement. The optional cable management kit provides a clean installation.



VT-74 electrical linear phoropter arm

The VT-74 has the same specifications of the VT-72, however this arm is electrically driven by using a foot switch.

OC-6 ophthalmic chair



Blue



Grey



Black (black column)



Red

OC-6 patient chair

The OC-6 patient chair is designed to provide a comfortable seat for patients during examination. The standard arm rests are foldable and the chair can rotate by 118,5°. An optional footrest is available to enhance patient's comfort. The up-down stroke of the chair has increased in order to allow easy access and usage for patients.

The OC-6 is available in four attractive colours: blue, grey, black, and red.



OC-6 optional accessories



Foot rest



Up-down foot switch



OC-6 base plate available with or without wheels



Projector wall mount bracket

IS-600 III colour options & specifications

Available colours

IS-600 III comes in two different colours which both match perfectly with the Topcon instrument colours. Metal parts of IS-600 III ophthalmic unit are painted in aluminium colour, emphasising the modern and smooth design of the unit.



IS-600 III finishing in light blue



IS-600 III finishing in white

Unit: white

Unit: light blue

Phoropter arms

	VT-670	VT-671	VT-72	VT-74
Load capacity range	4.5 to 10 Kg (adjustable)			
Stroke of phoropter arm	+ 43° / - 15°			
Maximum horizontal rotation of phoropter arm	Free			
Positioning lock	Mechanical	Counterbalanced		
Net weight of phoropter arm	6.6 Kg	6.6 Kg	9 Kg	11 Kg
Linear movement			Manual	Electrical
Cable management kit			Optional	Standard



Ophthalmic chair: OC-6

Arm rest	Foldable
Seat rotation	118.5°
Stroke (measured at seat plane)	Min. 460 / Max. 650 mm
Max. load capacity	175 Kg
Net weight of OC-6	30 Kg
Power consumption	220v - 240 V AC / 50 - 60 Hz.
Capacity / consumption	Max. 700 VA

Specifications

Tabletop	Suitable for 2 instruments (with or without elevation available)
Maximum load on tabletop	40 Kg
Power on tabletop	0-12V / 5A or 15V / 5A
Power near vision lamp	3W LED
Power of room illumination	0-240V / Max. 100W
Safety stop	Safety stop available underneath tabletop
Inside dimension trial lens drawer	460 x 350 x 70 mm
Minimum installation dimensions	1600(w) x 1550(d) x 2012(h) mm
Stroke elevated tabletop	130 mm (790 mm – 920 mm)
Height fixed tabletop	860 mm
Total power supply	220-240V / 50-60 Hz
Maximum power consumption	1.000 W
Electrical classification	Class I, Type B
Electronic soft start system	Yes
Net weight of IS-600 III	192 Kg

IS-600 III measurements

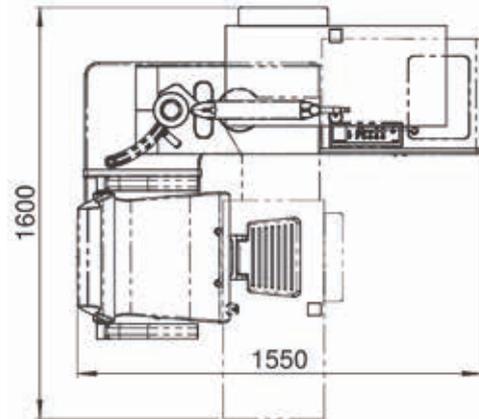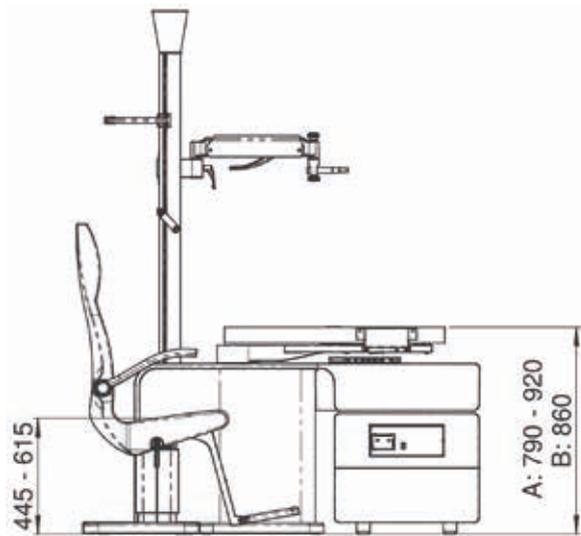

IMPORTANT

Subject to change in design and/or specifications without advanced notice.

In order to obtain the best results with this instrument, please be sure to review all user instructions prior to operation.



Topcon Europe Medical B.V.
Essebaan 11; 2908 LJ Capelle a/d IJssel; P.O. Box 145;
2900 AC Capelle a/d IJssel; The Netherlands
T: +31-(0)10-4585077; F: +31-(0)10-4585045
medical@topcon.eu; www.topcon-medical.eu

Topcon Danmark
Praestemarksvej 25; 4000 Roskilde, Danmark
T: +45-46-327500; F: +45-46-327555
info@topcon.dk; www.topcon.dk

Topcon Scandinavia A.B.
Neogatan 2; P.O. Box 25; 43151 Mölndal, Sweden
T: +46-(0)31-7109200; F: +46-(0)31-7109249
medical@topcon.se; www.topcon.se

Topcon España S.A.
Frederic Mompou, 4;
08960 Sant Just Desvern; Barcelona, Spain
T: +34-93-4734057; F: +34-93-4733932
medica@topcon.es; www.topcon.es

Topcon Italy
Viale dell' Industria 60;
20037 Paderno Dugnano, (MI) Italy
T: +39-02-9186671; info@topcon.it; www.topcon.it

Topcon France
BAT A1; 3 route de la révolte; 93206 Saint Denis Cedex
T: +33-(0)1-49212323; F: +33-(0)1-49212324
topcon@topcon.fr; www.topcon-medical.fr

Topcon Deutschland Medical GmbH
Hanns-Martin-Schleyer Strasse 41;
D-47877 Willich, Germany
T: (+49) 2154-885-0; F: (+49) 2154-885-177
info@topcon-medical.de; www.topcon-medical.de

Topcon Polska Sp. z o.o.
ul. Warszawska 23; 42-470 Siewierz; Poland
T: +48-(0)32-670-50-45; F: +48-(0)32-671-34-05
www.topcon-polska.pl

Topcon (Great Britain) Ltd.
Topcon House; Kennet Side; Bone Lane; Newbury
Berkshire RG14 5PX; United Kingdom
T: +44-(0)1635-551120; F: +44-(0)1635-551170
medical@topcon.co.uk; www.topcon.co.uk

Topcon Ireland
Unit 276, Blanchardstown; Corporate Park 2
Ballycoolin; Dublin 15, Ireland
T: +353-18975900; F: +353-18293915
medical@topcon.ie; www.topcon.ie